

LUXORliving H6

Article number: 4800440

Description




- 6-way heating actuator LUXORliving
- 6 potential-free triac outputs (24 V-250 V AC)
- Emergency program for bus or telegram failure
- Summer operation and valve protection
- LED switching status display for each channel
- Manual operation on device

Technical data

Operating voltage	110 – 240 V AC
Stand-by consumption	~0,3 W
Width	4 modules
Installation type	DIN rail
Number of channels	6
Switching output	Not potential-free
Output	Triac
Voltage output	24 V AC - 240 V AC
Frequency output	50 – 60 Hz
Type of protection	IP 20
Protection class	II according to EN 60 669

Connection example

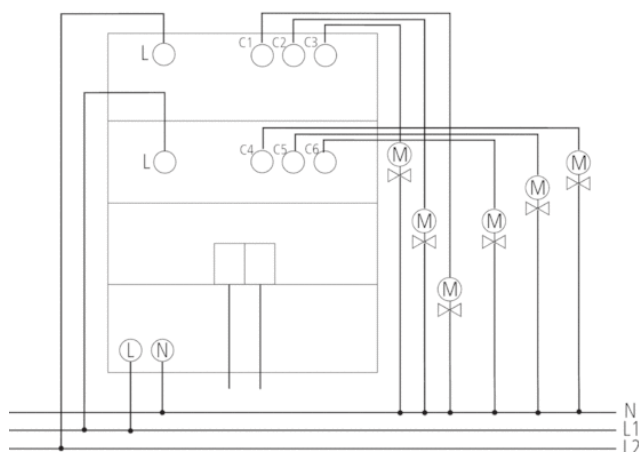

Scale drawings

