

theMova S360-100 FLAT DE WH

Item no.: 1030540



Presence and motion detectors Indoor detectors

Description

- *Available november 2020*
- Passive infra-red motion detector for ceiling installation in false ceilings
- Circular detection area 360°, up to Ø 8 m (50 m²) at mounting height 3 m
- 1 channel light (Relay 230 V)
- Automatic motion and brightness-dependent control for lighting
- Mixed light measurement
- Operation as fully automatic device
- Brightness switching value configurable, teach-in function
- Pulse function for staircase light time switch
- Time delay configurable
- Detection sensitivity configurable
- Test mode for checking function and detection area
- Ready for immediate use due to factory presetting (Brightness switching value 300 lux, Time delay 10 min.)
- One of these optional remote controls is required for changing the values and attitudes:
 - Management remote control SendoPro
 - Installation remote control theSenda P
 - Optional user remote control: theSenda S



Subject to technical changes and misprints

additional information at: www.theben.de/product/1030540

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

05/11/2020

Page 1 of 3

theMova S360-100 FLAT DE WH


Item no.: 1030540

Technical data

theMova S360-100 FLAT DE WH	
Operating voltage	230 V AC
Frequency	50 Hz
Installation height	2 – 4 m
Installation type	Ceiling installation
Colour	White
Switching output	Light
Stand-by consumption	~0.5 W
Light measurement	Mixed light measurement
Setting range brightness	30 – 3000 lx
Light switch-off delay	10 s – 60 min
Type of contact light	Relay 230 V/ 10 A µ-contact

theMova S360-100 FLAT DE WH	
Lamps	Incandescent/halogen lamps, fluorescent lamps, Energy saving lamps, LEDs
Incandescent/halogen lamp load	2300 W
Compact and fluorescent lamps	1150 VA (cos ϕ = 0,5)
Inrush current	max. 400 A / 200 μ s
LED lamp < 2 W	25 W
LED lamp 2-8 W	250 W
LED lamp > 8 W	250 W
Type of connection	Spring terminals
Detection range	50 m ² ($\varnothing$ 8 m 360°)
Ambient temperature	-15°C ... 50°C
Type of protection	IP 54 (when fitted)

Connection example



Detection range for planning applications


Mounting height (A)	Head on to (R)	Diagonally (t)
2 m	5 m ² 2.5 m	38 m ² 7 m
2.5 m	7 m ² 3 m	38 m ² 7 m
3 m	13 m ² 4 m	50 m ² 8 m
3.5 m	13 m ² 4 m	50 m ² 8 m
4 m	13 m ² 4 m	64 m ² 9 m

theMova S360-100 FLAT DE WH


Item no.: 1030540

theben
energy saving comfort

Detection range for planning applications

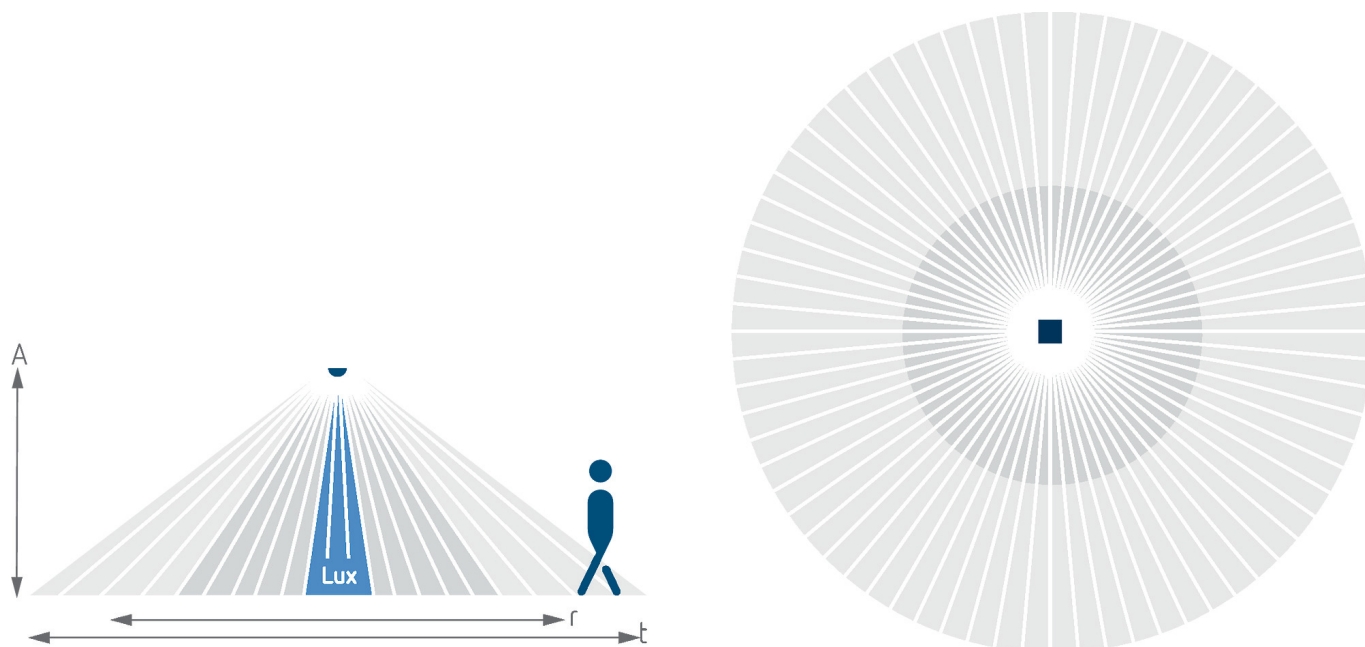

Scale drawings

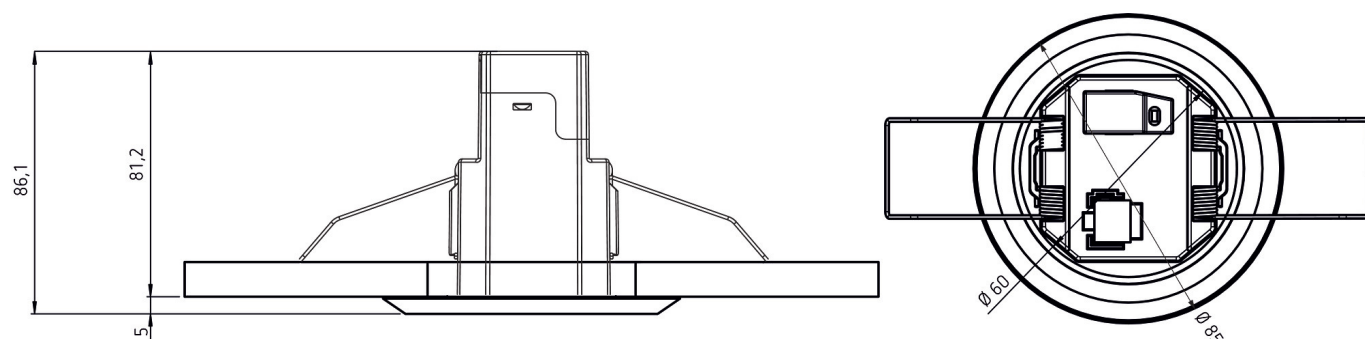

Accessories

theSenda P
Item no.: 9070910



theSenda S
Item no.: 9070911



theSenda B
Item no.: 9070985



Cover FLAT 85 GR
Item no.: 9070597



Subject to technical changes and misprints

additional information at: www.theben.de/product/1030540

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

05/11/2020

Page 3 of 3