


Description

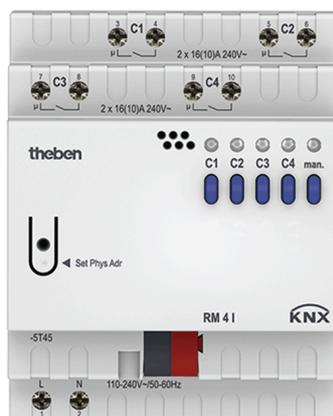

- 4-way C load switching actuator FIX1
- With current recognition
- For higher lamp loads
- LED switching status display for each channel
- Manual operation on device (even without bus connection)
- Adjustable characteristics: e.g. switching, delayed switching, pulse function
- Links, type of contact (NC contact/NO contact) and participation in central commands such as continuous On, continuous Off, central switching and save/call up scene
- Switching functions: On/Off, pulse, On/Off delay, staircase light with warning
- Logical links: e.g. lock, AND, release, OR


Technical data

Operating voltage KNX	Bus voltage, ≤ 4 mA
Operating voltage	110 – 240 V AC
Frequency	50 – 60 Hz
Stand-by consumption	$\sim 1,3$ W
Installation type	DIN rail
Width	4 modules
Type of connection	Terminal screws Bus connection: KNX bus terminal
Max. cable cross section	Solid wire: 0.5 mm ² (\varnothing 0.8) to 4 mm ² Stranded wire with end sleeve: 0.5 mm ² to 2.5 mm ²
Number of channels	4
Type of contact	NO contact, 16 A, 10 A
Opening width	< 3 mm
Resistive load	3680 W
Capacitive load	200 μ F
Incandescent lamp load	2600 W
Fluorescent lamp load (conventional) parallel-corrected	2000 W (200 μ F)
Fluorescent lamp load (electronic ballast)	1650 W
Energy saving lamps	410 W
LED lamp < 2 W	75 W
LED lamp 2-8 W	850 W
LED lamp > 8 W	850 W
Inrush current	max. 1500 A / 200 μ s
Voltage output	240 V AC
Switching output	Potential-free
Switching of various phases	Possible
Suitable for SELV	Yes if all channels switch at SELV
Accuracy current measurement	$I > 1$ A: ± 8 % of measured value; $I < 1$ A: ± 100 mA; lowest measurable value: 150 mA

Article number: 4940210

C load	<input type="checkbox"/>
Type	Module FIX1
Ambient temperature	-5 °C ... +45 °C
Type of protection	IP 20
Protection class	II according to EN 60 669

Connection example

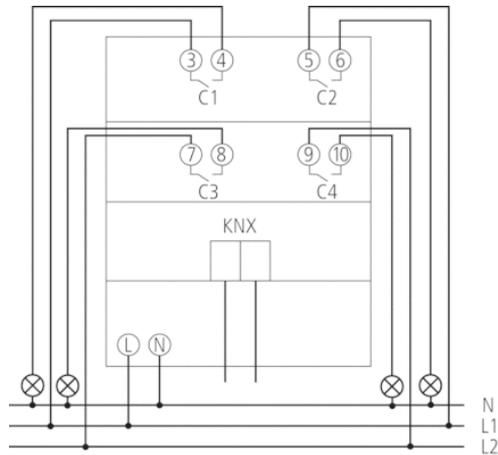

Scale drawings

