LUXORIiving H1 S RF

Item no.: 4800641



Home and Building control LUXORIiving

Description

- 1-way wireless flush-mounted heating actuator LUXORliving
- Noiseless control of thermal actuators 230 V AC
- Integrated temperature controller heating/cooling
- Valve protection function
- Encrypted wireless communication
- Easy installation due to the compact housing
- 2 binary inputs for floating contacts such as buttons, switches, temperature sensor (12)
- Integrated temperature monitoring for increased operating safety, e.g. in the event of overload



Technical data

	LUXORIiving H1 S RF
Operating voltage	230 V AC 50 – 60 Hz
Frequency	50 – 60 Hz
Stand-by consumption	~0.4 W
Installation type	Flush-mounted
Number of channels	1


	LUXORliving H1 S RF
Type of contact	1 A
Ambient temperature	-5°C 45°C
Protection class	II

LUXORIiving H1 S RF

Item no.: 4800641



Scale drawings

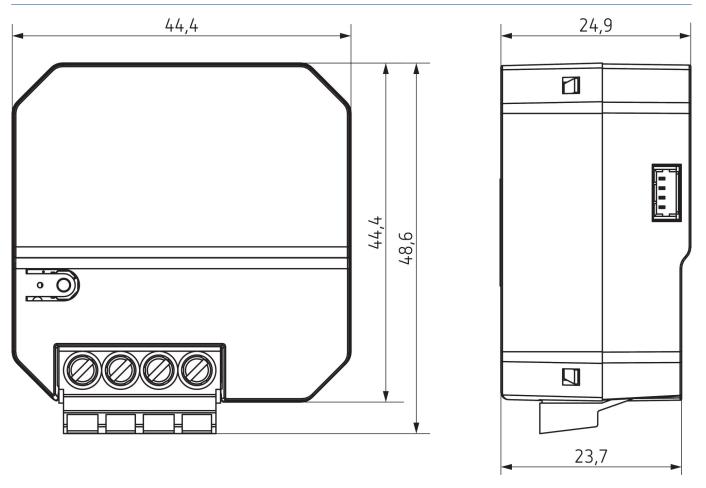

Accessories

Temperature sensor Item no.: 9070321



Temperature sensor RAMSES IP 65 Item no.: 9070459

theben

Actuator ALPHA 5 230 V Item no.: 9070441



Flush-mounted temperature sensor Item no.: 9070496

