

LUXORliving D4 DALI

Item no.: 4800300



Home and Building control
LUXORliving

Description

- 4-way DALI actuator LUXORliving, DALI-2 certified
- Interface between bus system and DALI lighting system (Digital Addressable Lighting Interface)
- For controlling up to 30 DALI operating devices per channel via broadcast commands
- Enables very simple commissioning without the effort of addressing or grouping on the DALI side
- Even in the event of a fault, simple replacement of DALI control gear without further programming
- Internal DALI power supply with 60 mA output current per channel
- In addition to the classic functions such as switching, dimming, scenes, the DALI actuator also offers the possibility of colour and colour temperature control (Device Type 8)



Technical data

LUXORliving D4 DALI	
Operating voltage KNX	≤10 mA
Operating voltage	110 – 240 V AC 50 – 60 Hz
Frequency	50 – 60 Hz
Width	4 modules
Installation type	DIN rail
Number of channels	4


LUXORliving D4 DALI	
Lamp types	Incandescent, low-voltage and high-voltage halogen and dimmable energy saving lamps and LED
Ambient temperature	-5°C ... 45°C
Type of protection	IP 20
Protection class	II according to EN 60 669

LUXORliving D4 DALI

Item no.: 4800300

theben

Connection example

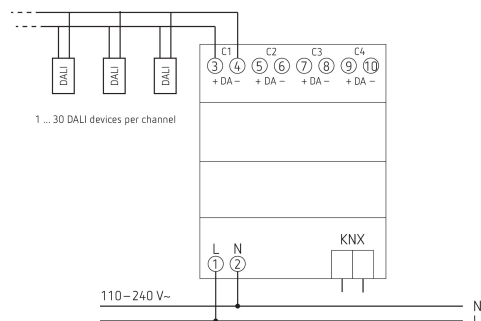

Subject to technical changes and misprints

additional information at: www.theben.de/product/4800300

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

07/05/2022

Page 2 of 2