


Slim Frame

Just 40 mm deep

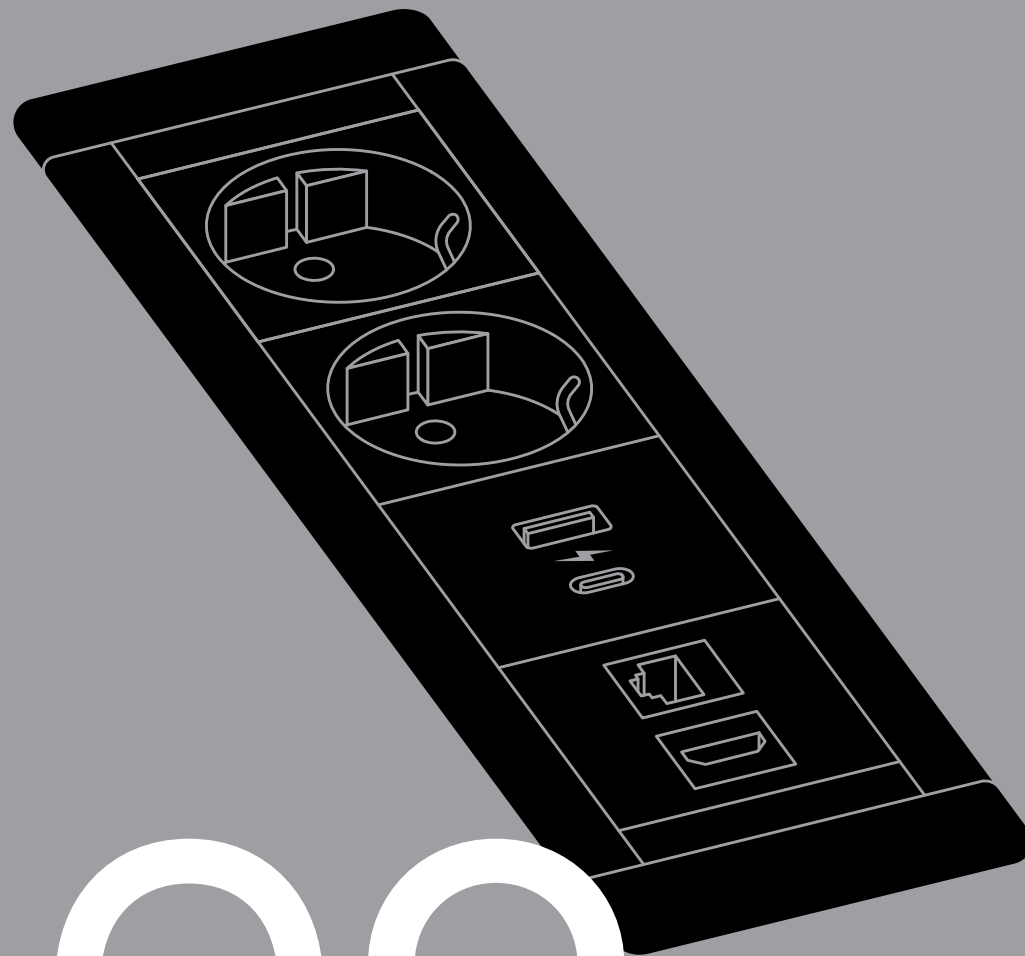

09

RECOMMENDED FOR:
Offices, schools,
hotel rooms

Minimum possible depth. The minimum of lines. When the unit needs to take up as little space as possible under the worktop, especially where there are drawers, on bedside tables or on kitchen islands. The cable entry point is situated so it does not take up additional space underneath.

The depth of the unit is the same as that of a 40 mm kitchen worktop.

2-7 MODULES

MOST POPULAR CONFIGURATIONS

63⁰⁰ € • 2P1USBC2



68⁰⁰ € • 3P1USBC2



85⁰⁰ € • 2P1USBC2-2RJ45



116⁵⁰ € • 2P1USBC2-2RJ45-1USBC1HDMI



For available communications and power modules see pages 78 and 79

BENEFITS

- minimum possible depth
- the minimum of lines

PLASTIC ELEMENTS

Black
••
White

MODULES

Black
••
White

ALUMINIUM

Oxide coating,
Sand Brushed
••
Black
••
White



VOLTAGE
100-250 V max

CURRENT
16 A max

FREQUENCY
50-60 Hz

TEMPERATURE
0 – 40°C

RELATIVE HUMIDITY
0 – 95 % (non-condensing)

PROTECTION
IP 40



INSTALLATION

Fits into a rectangular opening. Dimensions given in instructions

••

Mounts on desk of thickness 3 mm or more

CABLES

Standard

Integrated 20 cm cable with EPN3MO connector

••

On request

any length and connector