


# Slim Cover

Just 40 mm deep

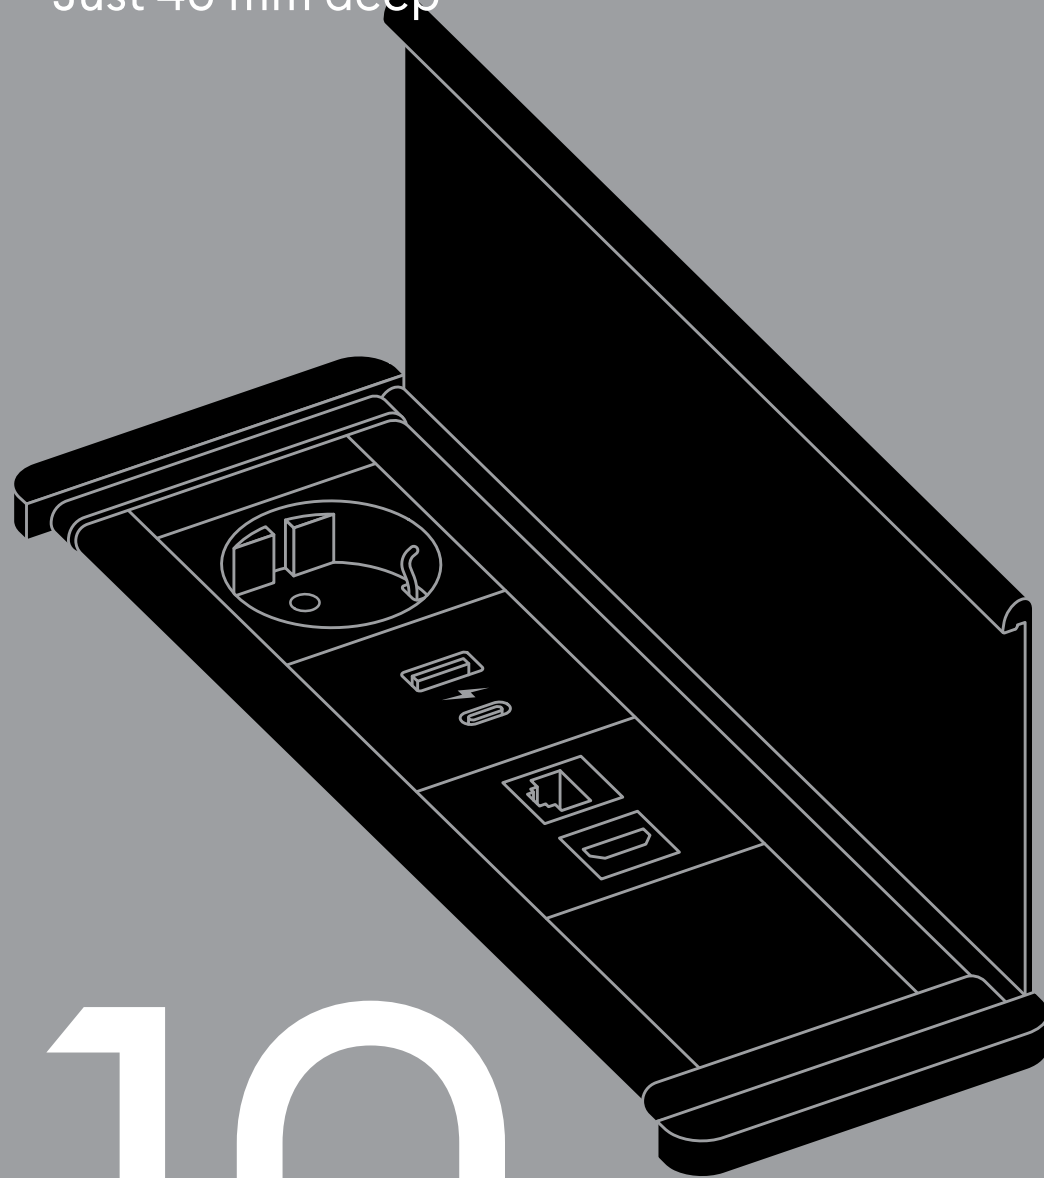

54

# 10

**RECOMMENDED FOR:**  
Offices, kitchens, schools

The cover shields the sockets and protects them from the environment. It has a 180-degree range of movement. When open, the back of the cover lays completely flat on the worktop, out of the way of the user.

The unit is mounted from the front, which allows for installation in locations where other devices cannot be mounted.

## 2-6

MODULES

55

### MOST POPULAR CONFIGURATIONS

75<sup>00</sup> € • 2PIUSBC2



81<sup>00</sup> € • 3PIUSBC2



98<sup>00</sup> € • 2PIUSBC2-2RJ45



131<sup>00</sup> € • 2PIUSBC2-2RJ45-IUSBCIHDMI



For available communications and power modules see pages 78 and 79

### BENEFITS

• minimum possible depth.

•

• cover protects sockets from dust and liquids

•

• can be mounted from the front

## PLASTIC ELEMENTS

Black  
••  
White

## MODULES

Black  
••  
White

## ALUMINIUM

Oxide coating,  
Sand Brushed  
••  
Black  
••  
White

56



DIGITEL



**VOLTAGE**  
100-250 V max

**CURRENT**  
16 A max

**FREQUENCY**  
50-60 Hz

**TEMPERATURE**  
0 – 40°C

**RELATIVE HUMIDITY**  
0 – 95 % (non-condensing)

**PROTECTION**  
IP 42

57



## INSTALLATION

Fits into a rectangular opening. Dimensions given in instructions

••

Mounts on desk of thickness 3 mm or more

## CABLES

### Standard

Integrated 20 cm cable with EPN3MO connector

••

### On request

any length and connector

DIGITEL