

# SM 4 KNX


Item no.: 4940310



## KNX REG-Aktoren und Gateways

### Description

- DIN-rail 4-way switching/dimming actuator 10 A 133  $\mu$ F, KNX TP
- For the control of electrical consumers with 0-10 V or 1-10 V interface
- Flexible use of control and relay outputs
- Control outputs suitable for active (0-10 V, source) and passive control (1-10 V, sink), as well as mixed operation
- Support of colour and colour temperature control
- Simple commissioning and programming in the ETS, without additional tools or ETS app
- Secure communication via with support of „KNX Data Secure“
- Inrush current max. 800 A, for the reliable switching of capacitive loads (ECG and LED drivers)

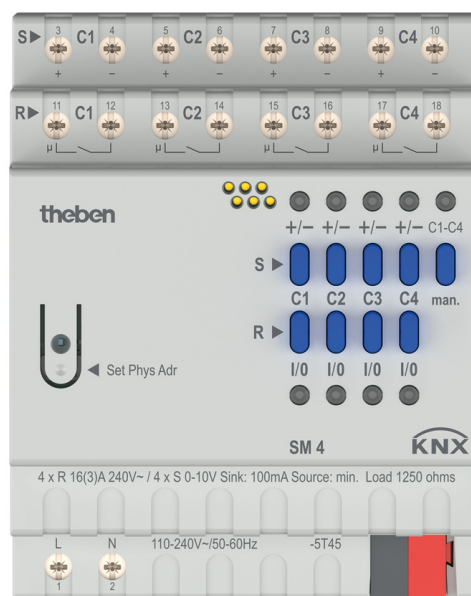

### Technical data

SM 4 KNX	
Operating voltage KNX	Bus voltage, <10 mA
Operating voltage	110 – 240 V AC 50 – 60 Hz
Frequency	50 – 60 Hz
Stand-by consumption	~0.5 W
Installation type	DIN rail
Width	4 modules
Type of connection	Terminal screws   Bus connection: KNX bus terminal
Max. cable cross section	Solid wire: 0.5 mm <sup>2</sup> (Ø 0.8) to 6 mm <sup>2</sup>   Stranded wire with end sleeve: 0.5 mm <sup>2</sup> to 4 mm <sup>2</sup>
Number of channels	4
Type of contact	10 A, 3 A


SM 4 KNX	
Opening width	< 3 mm
Incandescent/halogen lamp load	1200 W
LED lamp < 2 W	55 W
LED lamp 2-8 W	600 W
LED lamp > 8 W	600 W
Inrush current	max. 800 A / 200 $\mu$ s
Suitable for SELV	Yes if all channels switch at SELV
Type	Module FIX1
Ambient temperature	-5°C ... 45°C
Type of protection	IP 20
Protection class	II

Subject to technical changes and misprints

additional information at: [www.theben.de/product/4940310](http://www.theben.de/product/4940310)

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

## Connection example

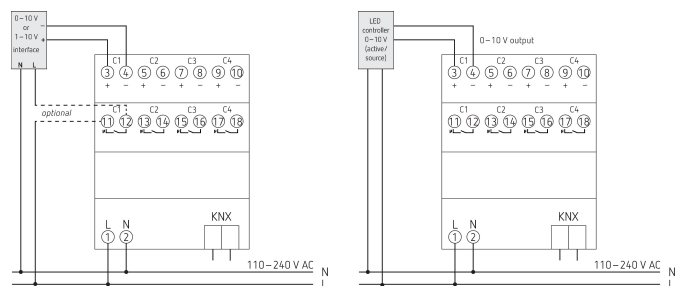

## Scale drawings

