


EMUG 40

Locknut, polyamide, RAL 7035, M40

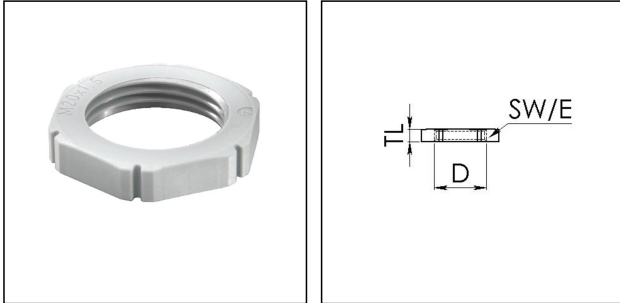

Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

SPRINT

hategen

RoHS

Material	Polyamide, fibre reinforced
Temp. range min	-40 °C
Temp. range max	100 °C
Glow wire test	650 °C
Thread type	M
Ø Connection thread D	40
Lead	1,5
Total length TL	7 mm
Key width SW	50 mm
Collar diameter (E)	55 mm
Product Color	RAL 7035
Order no. RAL 7035	10060775
Type	EMUG 40
Packing unit	50
ETIM-Classification	EC000940

17.06.2020

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com



Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice