Meteodata 140 basic KNX

Item no.: 1409205



Home and Building control KNX

Description

- Self contained outdoor weather station
- For measuring wind, brightness and temperature
- For fully automatic blinds and sun protection control
- Measurement and evaluation directly on device
- Sun protection for up to three facades via 3 integrated brightness sensors
- 4 additional threshold channels for connection of external KNX sensors
- 6 logic channels
- Display of weather data e.g. with VARIA 826 KNX multi-function display




Technical data

	Meteodata 140 basic KNX
Operating voltage KNX	Bus voltage, ≤10 mA
Installation type	Wall installation
Measuring range brightness	1 – 100000 lx
Setting range temperature	-30°C 60°C
Measuring range wind speed	2 - 30 m/s
Measuring range wind speed	2 – 30 m/s

	Meteodata 140 basic KNX
Ambient temperature	-20°C 55°C
Type of protection	IP 44
Protection class	III

Connection example





Meteodata 140 basic KNX

Item no.: 1409205



Scale drawings

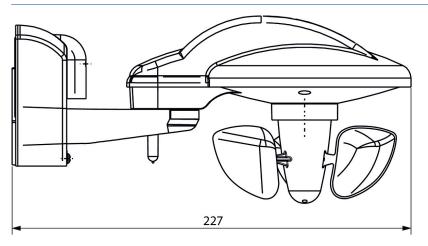



Accessories

Mast mounting S Item no.: 9070928



Mast mounting WML1 Item no.: 9070925

